


EPIC® H-D 25 stamped

Multi-pole inserts for stamped crimp contacts

The insert for rectangular connectors with pressed contacts is suitable for applications requiring a high number of contacts, such as in control systems.

Info

for automated production with crimping machine Suitable for processing with contacts on reel Made in Europe

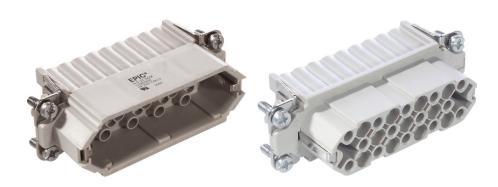





Mechanical and plant engineering



Space requirement



Robust

Renefits

Inserts of the connector series H-D are designed for applications in which a high number of contacts are required.

Application range

Machine and equipment manufacturing Control engineering

Technical Data

Classification ETIM 5: ETIM 5.0 Class-ID: EC000438

ETIM 5.0 Class-Description: Contact insert for industrial

connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000438

ETIM 6.0 Class-Description: Contact insert for industrial

connectors

Last Update (10.07.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16



EPIC® H-D 25 stamped

Rated voltage (V): IEC: 250 V

UL: 250 V

Rated impulse voltage: 2.5 kV

Rated current (A): IEC: 10 A

UL: 10 A

Pollution degree:

Contact resistance: < 2 mOhm

Contacts: Copper alloy, hard silver/gold-plated

Number of contacts: 25 + PE

Termination methods: Crimp termination: 0.14 - 2.5 mm²

Cycle of mechanical operation: 100

Certifications: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-D 25 stamped

Contact type Article designation Number of operating contacts Packaging unit Article number Article description H-D 25 SCG 11260000 1 - 25 male stamped H-D 25 BCG 5 11261000 female stamped 1 - 25