


# **EPIC® H-B 10 AD-BO**

Housing design H-B. The industry standard.

The robust metal housing with pivots for a direct lever and a seal is suitable for use in the plastics industry or investment construction.

#### Info

Metal lid with sturdy hinge Protection rating UL50E tested

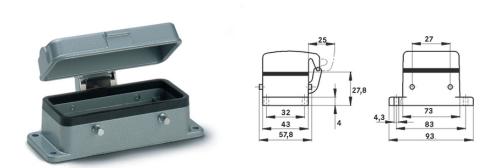





Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

### **Benefits**

The smallest housing with single and double lever. The right housing is available for every application

## **Application range**

Plant engineering Light & sound technology Plastics industry

# **Product features**

Last Update (26.07.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02\_03.16



# **EPIC® H-B 10 AD-BO**

H-A case: Wall base Bolts for double lever

Metal cover

Included: flat gasket

**Technical Data** 

Classification ETIM 5: ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material: Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating: IP 65 (latched)

IP 40 (cover closed)

NEMA 250, UL50E: 12, 4 (latched)

VDE-tested: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40°C to +100°C, short-term up to +125°C

#### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-B 10 AD-BO

#### Article number Article description М Packaging unit H-B housing: panel-mount base (cover, bolts for double lever) H-B 10 AD-BO AG 10 10033000