


EPIC® H-B 6 SGR-LB

Housing design H-B. The industry standard.

The universal low base housing has a cable entry and a single lever and is ideal for use in investment construction.

Info

Protection rating UL50E tested

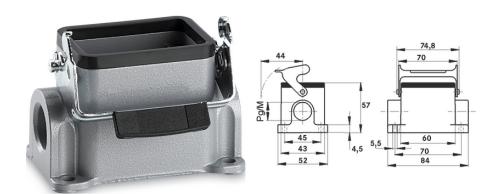







Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

Benefits

The smallest housing out of the H-B series. For inserts with high electrical properties

Application range

Plant engineering Control engineering Plastics industry

Product features

Surface-mount base, low version Single lever 1 cable entry

Last Update (07.08.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16





EPIC® H-B 6 SGR-LB

Technical Data

Classification ETIM 5: ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material: Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating: IP 65 (latched)

NEMA 250, UL50E: 12, 4 (latched)

VDE-tested: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-B 6 SGR-LB

Article description М Packaging unit Article number H-B 6 SGR M20 20 10 19005000 25 10 79005600 H-B 6 SGR M25

Last Update (07.08.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16