

Inserts for M23 circular connectors

EPIC® SIGNAL M23 Inserts 7 pole for M23 circular connector series

Info

Made in Germany











Mechanical and plant engineering



Wind Energy



Good chemical resistance



Mechanical resistance



Assembly time



Robust



Variety of approval certifications

Renefits

Universal further processing of the M23 inserts through different packaging units. Fully assembled with suitable solder contacts or unpopulated for individual assembly with crimp or solder contacts

Application range

Last Update (14.07.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16



Plant engineering Measurement and control technology Apparatus construction

Technical Data

Classification ETIM 5: ETIM 5.0 Class-ID: EC000438

ETIM 5.0 Class-Description: Contact insert for industrial

connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000438

ETIM 6.0 Class-Description: Contact insert for industrial

connectors

Rated voltage (V): according to IEC 61984: 150 V

Rated impulse voltage: 4 kV
Rated current (A): 18 A
Pollution degree: 3

Contact resistance: < 4 mOhm

Contacts: Gold-plated brass

Number of contacts: 7

7*2mm contacts

Termination methods: Crimp termination: 1.0 - 2.5 mm²

Solder termination: up to 2.5 mm²

Cycle of mechanical operation: 100

VDE-tested: Certified production control: VDE-REG. no. C24 (according to EN

61984, SELV according to DIN VDE 0100-410 has to be

guaranteed)

UL File Number: E249137

Temperature range: -25°C up to +125°C

Note


The inserts are suitable for both male and female contacts. For a complete connection, you will need one P-component and one E-component. P-component = left turning (anticlockwise), E-component = right turning (clockwise)

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

Pin configuration Article number Article description Contacts included Packaging unit Inserts 7-pin inserts, P-part = rotation to the left (plug side anticlockwise) P-part 5 44420148 without contacts 44420149 P-part without contacts 20 5 44420150 P-part 7 + male contacts, solder 5 44420152 P-part + female contacts, solder 44420153 20 P-part + female contacts, solder 7-pin inserts, E-part = rotation to the right (plug side clockwise) E-Part 5 44420154 without contacts 20 E-Part 44420155 without contacts 7 5 44420156 E-Part + male contacts, solder 44420157 E-Part 20 + male contacts, solder 5 44420158 E-Part female contacts, solder



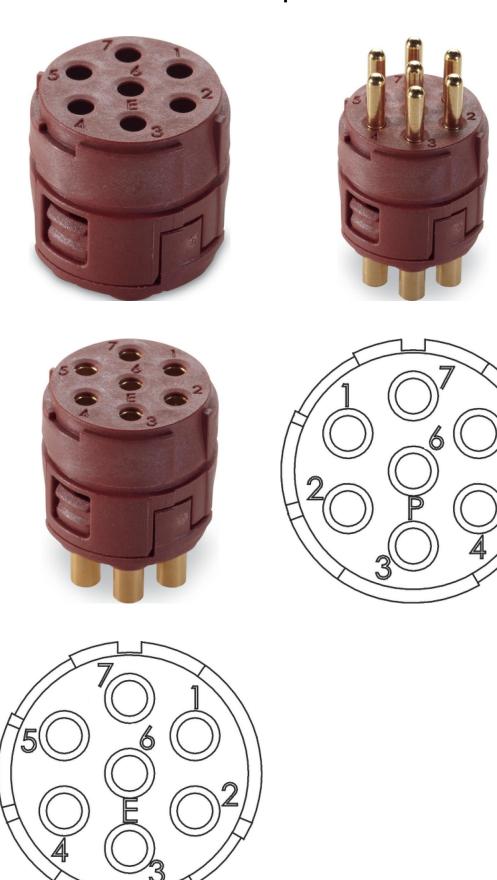

Last Update (14.07.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16