


EPIC® H-A 32 TS

Rugged housings for 2 inserts

The hood with a side cable entry and pivots for a double lever can accommodate two narrow inserts and is suitable for control systems.

Info

Compact, robust metal housings for double size H-A 32

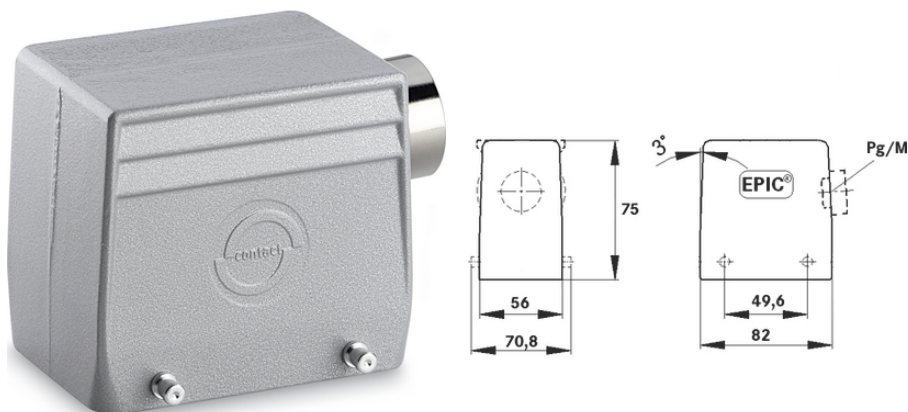

Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

Benefits

For two inserts of the small H-A, H-D and STA series. Space-saving

M40 housing extension on M50 with SKINTOP 53112083 possible (clamping range 27 - 35 mm)

Application range

Machine and equipment manufacturing

Control engineering

Product features

Hood

Bolts for double lever

Side cable entry

Versions with / without neck

Last Update (26.04.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® H-A 32 TS

Technical Data

| | |
|------------------------|--|
| Classification ETIM 5: | ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors |
| Classification ETIM 6: | ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors |
| Material: | Housing: aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR |
| Protection rating: | IP 65 (latched) |
| Temperature range: | -40°C to +100°C, short-term up to +125°C |

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

EPIC® H-A 32 TS

| Article number | Article description | M | PG | Neck | Pieces / PU |
|--|---------------------|----|----|------|-------------|
| H-A housing: hood (side cable entry, bolts for double lever) | | | | | |
| 10576000 | H-A 32 TS 21 | - | 21 | yes | 5 |
| 10576200 | H-A 32 TS 21 | - | 21 | - | 5 |
| 10577000 | H-A 32 TS 29 | - | 29 | yes | 5 |
| 19576000 | H-A 32 TS M25 | 25 | - | - | 5 |
| 19577000 | H-A 32 TS M32 | 32 | - | - | 5 |
| 19577500 | H-A 32 TS M40 | 40 | - | - | 5 |