EPIC® H-B 24 SGRLH-LB

Housing design H-B. The industry standard.

The metal housing for rectangular connectors consists of a single lever and 2 cable entries and is not only intended for use in investment construction.

Info

More interior space for wiring
Single Lever version for quick locking and simple unlocking with lifting aid
Protection rating UL50E tested

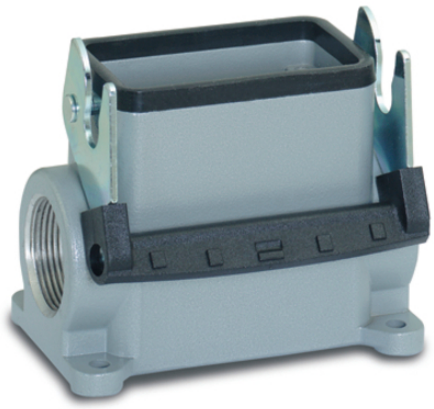

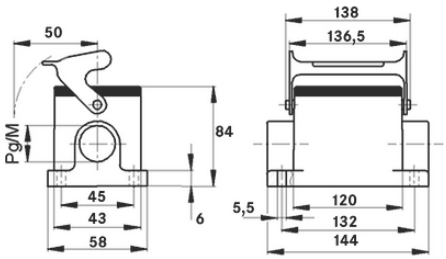

Supplementary automation components from Lapp

Mechanical and plant engineering

Mechanical resistance

Robust

Waterproof

Benefits

Safe fixing with 4 screws
Casted neck for easy assembly of the cable gland

Application range

Plant engineering
Light & sound technology
Plastics industry

Last Update (01.06.2026)
©2026 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16

EPIC® H-B 24 SGRLH-LB

Product features

Surface-mount base, high version
Single lever
2 cable entries

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched) NEMA 250, UL50E: 12 (latched)
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

©2026 Lapp Group - Technical changes reserved

LAPP

PRODUCT INFORMATION

EPIC® H-B 24 SGRLH-LB

Article number	Article description	M	Packaging unit
79161200	H-B 24 SGRLH-LB M25	25	5
79161400	H-B 24 SGRLH-LB M32	32	5

Last Update (01.06.2026)
©2026 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16