

## EPIC® H-B 24 TG 2X

Housing design H-B. The industry standard.


The universal metal housing with pivots for a double lever and 2 direct cable entries is suitable for use in lighting and sound systems.

### Info

Non-slip ridges for comfortable disconnecting

For easy introduction of two cables

Protection rating UL50E tested

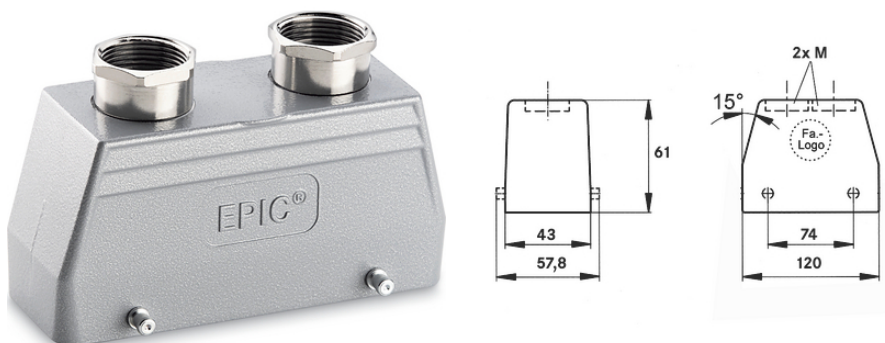

Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

### Benefits

Ideal for many applications due to a wide range of housings and inserts

### Application range

Plant engineering

Light & sound technology

Plastics industry

Last Update (23.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## EPIC® H-B 24 TG 2X

### Product features

Hood, low version  
Bolts for double lever  
2 straight cable entries  
Versions with neck

### Technical Data

|                        |  |
|------------------------|--|
| Classification ETIM 5: | ETIM 5.0 Class-ID: EC000437<br>ETIM 5.0 Class-Description: Housing for industrial connectors |
| Classification ETIM 6: | ETIM 6.0 Class-ID: EC000437<br>ETIM 6.0 Class-Description: Housing for industrial connectors |
| Material:              | Housing: powder-coated aluminium alloy, grey<br>Lever: zinc-plated steel<br>Sealing: NBR     |
| Protection rating:     | IP 65 (latched)<br>NEMA 250, UL50E: 12, 4 (latched)  |
| VDE-tested:            | Certified production control: VDE-REG. no.: B437<br>UL-tested:<br>UL File Number: E75770     |
| Temperature range:     | -40 °C to +100 °C, short-term up to +125 °C  |

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® H-B 24 TG 2X**

| Article number   | Article description | M      | Neck | Pieces / PU |
|--|---------------------|--------|------|-------------|
| H-B housing: hood (2 straight cable entries, bolts for double lever) |                     |        |      |             |
| 44422019   | H-B 24 TG 2XM25     | 2 x 25 | yes  | 5           |
| 44422020   | H-B 24 TG 2XM32     | 2 x 32 | yes  | 5           |

Last Update (23.12.2023)

©2023 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16