EPIC® H-B 24 TG 2X

Housing design H-B. The industry standard.

The universal metal housing with pivots for a double lever and 2 direct cable entries is suitable for use in lighting and sound systems.

Info

Non-slip ridges for comfortable disconnecting
For easy introduction of two cables
Protection rating UL50E tested

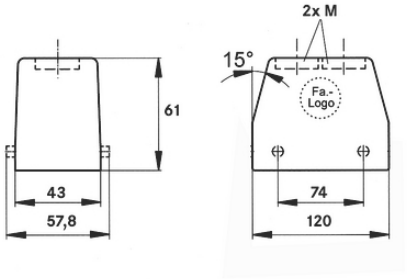

Supplementary automation components from Lapp

Mechanical and plant engineering

Mechanical resistance

Robust

Waterproof

Benefits

Ideal for many applications due to a wide range of housings and inserts

Application range

Plant engineering
Light & sound technology
Plastics industry

Last Update (08.08.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16

EPIC® H-B 24 TG 2X

Product features

Hood, low version
Bolts for double lever
2 straight cable entries
Versions with neck

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched) NEMA 250, UL50E: 12, 4 (latched)
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Temperature range:	-40 °C to +100 °C, short-term up to +125 °C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.

©2025 Lapp Group - Technical changes reserved

LAPP

EPIC® H-B 24 TG 2X

PRODUCT INFORMATION

Article number	Article description	M	Neck	Packaging unit
H-B housing: hood (2 straight cable entries, bolts for double lever)				
44422019	H-B 24 TG 2XM25	2 x 25	yes	5
44422020	H-B 24 TG 2XM32	2 x 32	yes	5

Last Update (08.08.2025)
©2025 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16