


## PRODUCT INFORMATION

## EPIC® H-B 32 SGRL

Housing design H-B for 2 inserts.

This connector housing with 2 double levers and 2 cable entries can be used in investment construction and the plastics industry.

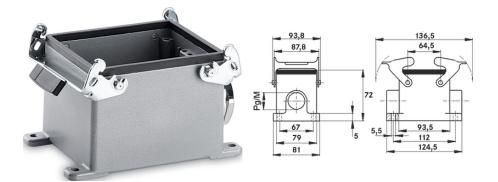

# CER

#### **Benefits**

Two inserts in one housing. With two levers for high safety M40 housing extension on M50 with SKINTOP 53112083 possible (clamping range 27 - 35 mm)

### **Application range**

Plant engineering Control engineering Plastics industry

### **Product features**

Surface-mount base Dual levers 2 cable entries

#### **Technical Data**

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors	
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors	
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR	
Protection rating:	IP 65 (latched)	
Temperature range:	-40°C to +100°C, short-term up to +125°C	

#### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Last Update (22.02.2024) ©2024 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02\_03.16



## EPIC® H-B 32 SGRL

Prices are net prices without VAT and surcharges. Sale to business customers only.

Last Update (22.02.2024) ©2024 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02\_03.16

Last Up ©2024	Article number	Article description	Μ	PG	Pieces / PU
	H-B housing: surface-mount base (2 cable entries, double lever)				
odate	10138000	H-B 32 SGRL 29	-	29	5
e (2)	19138000	H-B 32 SGRL M32	32	-	5
(22.02	19145400	H-B 32 SGRL M40	40	-	5

Last Update (22.02.2024) ©2024 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02\_03.16 **EPIC® H-B 32 SGRL**