

## EPIC® H-B 6 SDRL-LB


Housing design H-B. The industry standard.

The robust universal base housing has 2 cable entries and 1 single lever and can be used, for example, in investment construction or control systems.

### Info

Metal lid with sturdy hinge

Protection rating UL50E tested

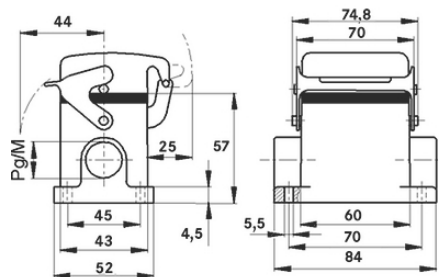

Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

### Benefits

The smallest housing out of the H-B series. For inserts with high electrical properties

### Application range

Plant engineering

Control engineering

Plastics industry

### Product features

Surface-mount base, low version

Last Update (13.10.2025)

©2025 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## EPIC® H-B 6 SDRL-LB

Single lever  
2 cable entries  
Metal cover

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors
Material:	Housing: powder-coated aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched) NEMA 250, UL50E: 12, 4 (latched)
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Temperature range:	-40°C to +100°C, short-term up to +125°C

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.



## EPIC® H-B 6 SDRL-LB

Article number	Article description	M	Packaging unit
19009000	H-B 6 SDRL-LB M20	20	10
79016600	H-B 6 SDRL-LB M25	25	10

Last Update (13.10.2025)

©2025 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16